
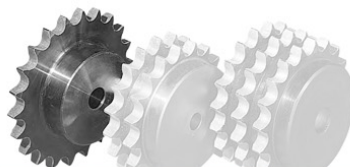


PIGNONI

5 x 2.5 mm

per catene a rulli secondo
DIN 8187 - ISO/R 606



R. Garotti & F. gliò s.r.l.

SEMPLICI

Z	d _e	d _p	d _m	D ₁	A
8	15.2	13.06	7	4	10
9	16.8	14.62	8	5	10
10	18.3	16.18	9	5	10
11	19.9	17.75	11	6	10
12	21.5	19.32	12	6	10
13	23.0	20.89	14	6	10
14	24.6	22.47	15	6	10
15	26.2	24.04	16	6	10
16	27.8	25.63	18	8	13
17	29.4	27.20	18	8	13
18	30.9	28.79	18	8	13
19	32.5	30.38	18	8	13
20	34.1	31.96	18	8	13
21	35.7	33.54	20	8	13
22	37.3	35.13	20	8	13
23	38.9	36.72	20	8	13
24	40.5	38.30	20	8	13
25	42.0	39.89	20	8	13
26	43.6	41.48	25	8	15
27	45.2	43.07	25	8	15
28	46.8	44.65	25	8	15
29	48.4	46.25	25	8	15
30	50.0	47.83	25	8	15
31	51.6	49.42	30	8	15
32	53.2	51.01	30	8	15
33	54.8	52.60	30	8	15
34	56.3	54.19	30	8	15
35	57.9	55.78	30	8	15
36	59.5	57.37	30	8	15
37	61.1	58.96	30	8	15
38	62.7	60.54	30	8	15
39	64.3	62.13	30	8	15
40	65.9	63.73	30	8	15

PIGNONE

RAGGIO DENTE r ₃	5 mm
LARGHEZZA RAGGIO C	0.6 mm
LARGHEZZA DENTE PIGNONE B ₁	2.3 mm

CATENA

PASSO	5 mm
LARGHEZZA INTERNA	2.5 mm
RULLO Ø	3.2 mm

MATERIALE: C 45 UNI 7845