


# PULEGGE DENTATE PER CINGHIE POSITIVE IN POLLICI - FORO CONICO PER BUSSOLA TAPER LOCK PASSO H (1/2", 12.7mm) PER CINGHIA LARGA 300 (76.20mm)




Materiale

AC = ACCIAIO


GH = GHISA

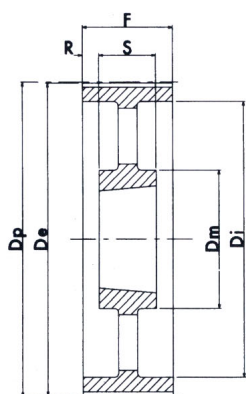

ESECUZIONE 12



ESECUZIONE 13F

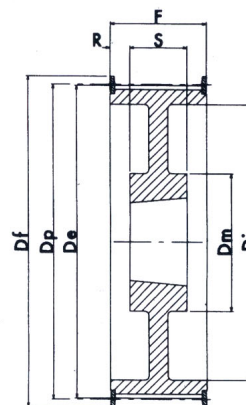

ESECUZIONE 14F

N°Denti	BUSSOLA	FORO MAX mm	Esecuzione	Flangia	Dp	De	Df	Dm	Di	F	S	R	Materiale	Codice
					mm	mm	mm	mm	mm	mm	mm	mm		
20	1615	42	13F	✓	80.55	79.48	87	-	64.5	84.0	38.0	23.0	AC	20H300FTL
21	1615	42	13F	✓	84.89	83.52	91	-	65	84.0	38.0	23.0	AC	21H300FTL
22	1615	42	13F	✓	88.94	87.56	94	-	67	84.0	38.0	23.0	AC	22H300FTL
23	1615	42	13F	✓	92.98	91.61	97	-	70	84.0	38.0	23.0	AC	23H300FTL
24	1615	42	13F	✓	97.02	95.65	102	-	73.5	84.0	38.0	23.0	AC	24H300FTL
25	1615	42	13F	✓	101.06	99.69	106	-	77	84.0	38.0	23.0	AC	25H300FTL
26	1615	42	13F	✓	105.11	103.73	112	-	82	84.0	38.0	23.0	AC	26H300FTL
27	2012	50	13F	✓	109.15	107.78	115	-	85	84.0	32.0	26.0	AC	27H300FTL
28	2012	50	13F	✓	113.19	111.82	120	-	90.5	84.0	32.0	26.0	AC	28H300FTL
30	2012	50	13F	✓	121.28	119.90	128	-	98	84.0	32.0	26.0	AC	30H300FTL
32	2517	60	13F	✓	129.36	127.99	135	-	106	84.0	45.0	19.5	AC	32H300FTL
36	2517	60	13F	✓	145.53	144.16	150	-	121	84.0	45.0	19.5	AC	36H300FTL
40	2517	60	13F	✓	161.70	160.33	168	-	138	84.0	45.0	19.5	AC	40H300FTL
44	2517	60	14F	✓	177.87	176.50	184	119	150	86.0	45.0	20.5	AC	44H300FTL
48	2517	60	14F	✓	194.04	192.67	200	119	165	86.0	45.0	20.5	AC	48H300FTL
60	2517	60	12		242.55	241.18	-	119	223	86.0	45.0	20.5	GH	60H300TL
72	2517	60	12		291.06	289.69	-	119	270	86.0	45.0	20.5	GH	72H300TL
84	2517	60	12		339.57	338.20	-	119	320	86.0	45.0	20.5	GH	84H300TL
96	3030	75	12		388.08	386.71	-	150	362	86.0	76.0	5.0	GH	96H300TL
120	3030	75	12		485.10	483.73	-	150	460	86.0	76.0	5.0	GH	120H300TL

